



Gyprex

PVC laminated ceiling tiles.

Gyprex has a wipe-clean, hard-wearing surface, making it ideal for food preparation and hygienic facilities, as well as wet areas. It is available in a white finish as standard.

Gyprex is further enhanced compared to our standard gypsum plasterboard series (TopLine® and BaseLine®).


CHARACTERISTICS

High-performance, easy-to-maintain, vinyl-faced gypsum ceiling tile that offers outstanding value.

RECOMMENDED USE

Suitable for hygiene sensitive areas such as hospitals, kitchens, clean rooms as well as high humidity areas.

PRODUCT FORMAT

Thickness	9mm	12.5mm
Nominal Weight	5.25kg/m ²	7.60kg/m ²
Nominal Sheet Size	595mm x 595mm, 595mm x 1195mm 603mm x 603mm, 603mm x 1213mm	
Edge Type	Trim (Square) 	

FIRE RATING

- Low flame spread index <25 in accordance to ASTM E84
- Class 1 surface spread of flame in accordance to BS 476: Part 7
- Classified as Class 0 material in accordance to BS 476: Part 6 & 7

MANUFACTURING SPECIFICATIONS

- In compliance with ASTM C1396M and BS EN 520

AESTHETIC PROPERTIES

- Long wearing surface
- Washable surface
- Class 1 Clean Room Classification: ISO 14644-1

HANDLING AND WORKABILITY

- Lightweight
- Quick and easy installation
- Durable and long lasting

HEALTH AND ENVIRONMENTAL CONTRIBUTIONS

- Made from 100% natural gypsum
- Recyclable material, environmentally friendly
- Does not produce toxic fumes or hazardous substances that are harmful to health

QUALITY ASSURANCE

- Product is manufactured in a facility certified to ISO 14001, ISO 45001, ISO 9001



EASY TO TRANSPORT



ENERGY EFFICIENCY



ECO FRIENDLY



PRODUCTIVITY GAIN



STABILITY



RECYCLING CERTIFIED



SMOOTH MANUAL FINISH



INSPIRING SPACES



AESTHETIC & DESIGN




Gyproc Grid Ceiling System

A lay-in grid system based on lightweight gypsum plasterboard and a metal frame. It utilizes gypsum ceiling tiles with a perfect finish and combines durability with a unique aesthetic, offering various ceiling tile designs. The system is perfect for regular ceiling types and suitable for all pre-cut plasterboards.


Gyproc Grid Ceiling 600mm x 600mm Gyprex

Parameters	Values
Overall System Weight	8.50kg/m ²
Maximum Ceiling Span (mm)	Unlimited
Fire Performance (Board)	Class O

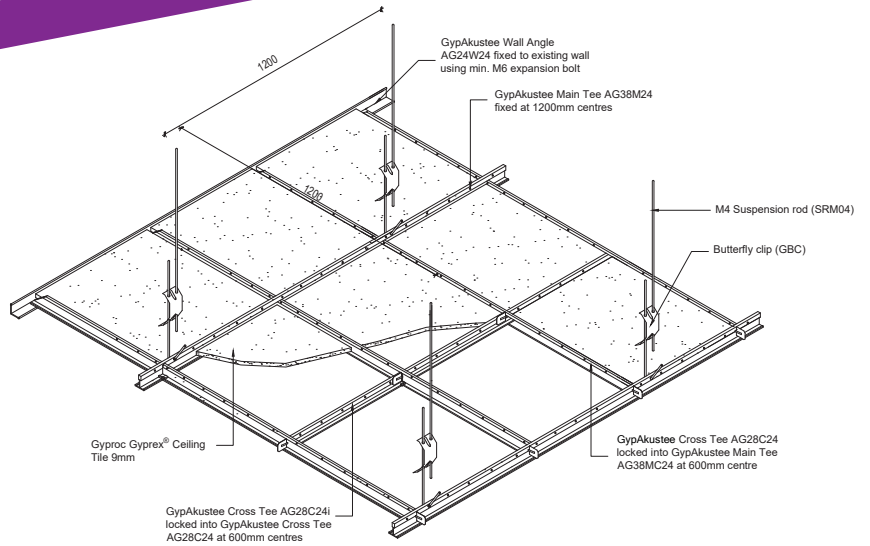


Gyproc Grid Ceiling 600mm x 1200mm Gyprex


Parameters	Values
Overall System Weight	8.50kg/m ²
Maximum Ceiling Span (mm)	Unlimited
Fire Performance (Board)	Class O

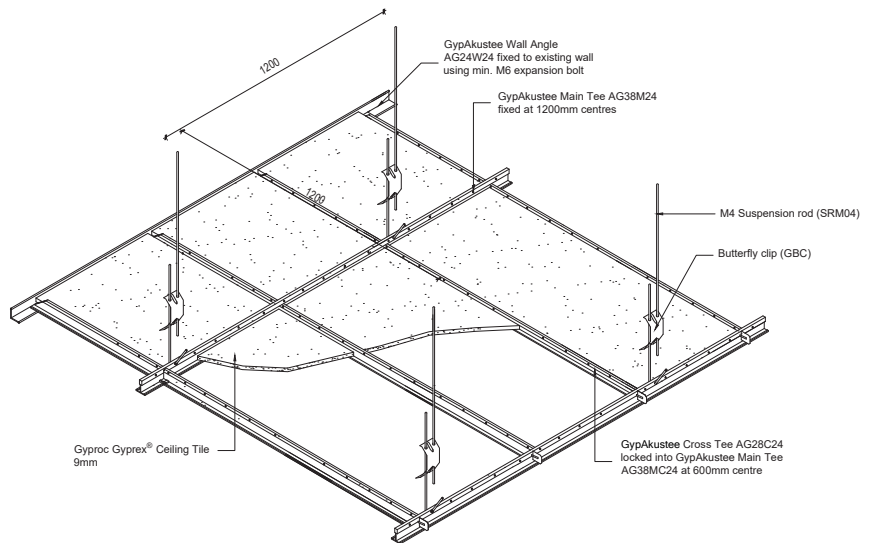


HANGING ANCHORAGE

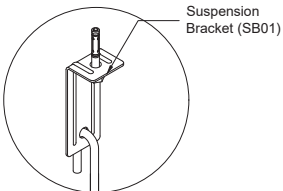


ANCHORAGE TO SOFFIT - OPTION 1



ANCHORAGE TO SOFFIT - OPTION 2

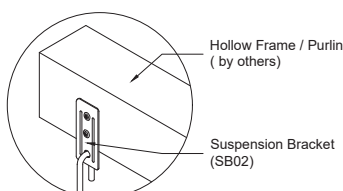

ANCHORAGE TO HS / PURLIN - OPTION 1

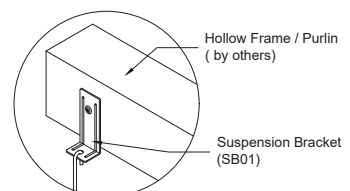

ANCHORAGE TO HS / PURLIN - OPTION 2

Disclaimer:
The images provided are for reference only. Kindly obtain confirmation from Gyproc's Technical Support Personnel before submission of specification for any project. The information in this literature is accurate at the time of publishing. The publisher reserves all rights to revise the product specifications without prior notice. It is the user's responsibility to ensure that the information communicated here is current before use and that the information provided here is for guidance only. Users must ensure that they are fully conversant with the products and systems before specification or installation.



SAINT-GOBAIN MALAYSIA SDN. BHD. (636775-T)
No 1 Jalan Sultan Mohamad 4.
Kawasan Perindustrian Bandar Sultan Suleiman.
42000 Port Klang, Selangor D E, Malaysia.
☎ +603 3169 5588 📠 +603 3169 5688
🌐 www.saint-gobain.my



SAINT-GOBAIN (SINGAPORE) PTE. LTD.
2 Venture Drive.
#13-18 Vision Exchange.
Singapore 608526.
☎ +65 6330 8288 📠 +65 6330 8289
🌐 www.saint-gobain.sg

