


Complete Product Guide



Product Applications





prima flex™

Features

- Square edge on 4 sides
- Smooth surface
- Suitable for butt joint, express joint, sealant joint finish
- Ideal substrate for various types of coating
- Good as heat & sound insulation
- Fire resistant - Class O (BS476 Part 6 & 7)

Sheet Sizes (mm)		Thickness (mm)							
Width	Length	3.2	4.5	6	9	12	16	18	20
603	1213	•	•						
610	1220	•	•	•					
1220	1220	•	•	•					
1220	2440		•	•	•	•	•	•	•

Applications

Wall Cladding, Partition, Ceiling / Eaves / Soffit Lining, Flooring, Roof Sarking, Water tank Support & Permanent Formwork



prima liner™

Features

- Rebated edge on 2 sides to facilitate flush-jointing
- Smooth surface
- Resistant to permanent water damage
- Profile / shape & dimensionally stable (low moisture movement)
- Ideal substrate for various types of finishes (coating, ceramic or marble tile)
- High impact strength
- Fire resistant - Class O (BS476 Part 6 & 7)

Sheet Sizes (mm)		Thickness (mm)		
Width	Length	6.0	9.0	12.0
1220	2440	•	•	•

Applications

Ceiling Lining & Wall Lining, **prima drywall** System



prima plank™ klassik

Surface Texture	Edge Detail	Sheet Sizes (mm)		Thickness (mm)		
		Width	Length	7.5	9.0	12.0
Smooth	Square Edge	230	3660	•	•	•
			4200	•	•	•
Woodgrain	Square Edge	230	3660	•	•	
			4200	•		

- Natural Fibre Cement colour (paintable)





prima plank™ ceiling

Surface Texture	Edge Detail	Sheet Sizes (mm)		Thickness (mm)
		Width	Length	9.0
Smooth	2 side V-Edge	100	3660	▲
Woodgrain	2 side V-Edge	100	3660	▲




Note: ▲ Indicates MOQ and special delivery lead time may apply. Please check with your local **prima** representative.

- Natural Fibre Cement colour (paintable)



prima plank™ shiplap

Surface Texture	Edge Detail	Sheet Sizes (mm)		Thickness (mm)
		Width	Length	9.0
Smooth	Lap Edge	230	3660	•
Woodgrain	Lap Edge	230	3660	•



- Natural Fibre Cement colour (paintable)



prima plank™ skirting

Surface Texture	Edge Detail	Sheet Sizes (mm)		Thickness (mm)
		Width	Length	9.0
Smooth	1 side V-Edge	100	3660	▲
Woodgrain	1 side V-Edge	100	3660	▲



Note: ▲ Indicates MOQ and special delivery lead time may apply. Please check with your local **prima** representative.

- Natural Fibre Cement colour (paintable)



prima plank™ gate & fencing

Surface Texture	Edge Detail	Sheet Sizes (mm)		Thickness (mm)
		Width	Length	9.0
Smooth	Square Edge	100	3660	▲
Woodgrain	Square Edge	100	3660	▲



Note: ▲ Indicates MOQ and special delivery lead time may apply. Please check with your local **prima** representative.

- Natural Fibre Cement colour (paintable)



prima lattice™

Features

- Low maintenance
- Weather resistant
- Termite resistant
- Good workability

Sheet Sizes (mm)		Thickness (mm)
Width	Length	6.0
1200	2400	•

Applications

Decorative Screening

Variants



prima vent™

Features

- Maintains good air circulation
- Weather resistant
- Cost effective
- Dimensionally stable
- Light weight
- Fire-resistant -
- Virtually maintenance free
- Natural Fibre Cement colour (paintable)

Sheet Sizes (mm)		Thickness (mm)	
Width	Length	3.2	4.5
610	1220	•	•
1220	1220	•	•



Applications

Slotted Eaves Lining




prima flex™ groove


Features

- Durable, dimensionally stable properties
- Decorative v-shaped grooves
- Requires low maintenance and offers fire resistance
- Natural Fibre Cement colour (paintable)

Sheet Sizes (mm)		Thickness (mm)
Width	Length	7.5
1200	2400	•
1200	2700	•



prima flex™ groove profile

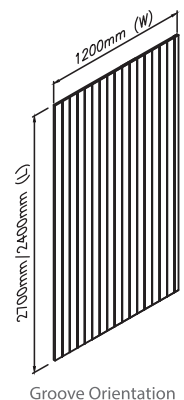



prima drywall

Wall Series

Features

- CIDB IBS certified
- Lightweight
- Fire resistant (FRP) Bomba Certified
- Sound insulation
- Water resistant
- Impact resistant
- Cost effective



System ID	General		Fire Rated	
	G76 L6	F76 L6 R1	F94 L9	F136 L12
Wall Thickness (mm)	76	76	94	136
Prima Liner Thickness	6	6	9	12
Estimated Mass (kg/m ²)	21	31	34	50
Sound Transmission Class	36dB	40dB	51dB	54dB
Fire Resistance (BS 476, Part22)	-	-	1 hr	2 hrs

System ID	Acoustic			
	A76 L6	A112 L6	A82 L9	A118 L9
Wall Thickness (mm)	76	112	82	118
Prima Liner Thickness	6	6	9	9
Estimated Mass (kg/m ²)	22	22.4	31	33
Sound Transmission Class	41dB	47dB	51dB	53dB
Fire Resistance (BS 476, Part22)	-	-	-	-

Accessories

prima fastener - specially designed to work with Prima fibre cement boards. Comes in packing of 1000pcs per box.

prima fastener - Wing Tek 25mm
Self-embedding head wing tek screw



prima fastener - Wing Tek 35mm
Self-embedding head wing tek screw





For more information, please contact us at:



SAINT-GOBAIN PRIMA SDN BHD (579898-W)

Level 19, Tower 5, Avenue 7 The Horizon,
 Bangsar South City, No. 8, Jalan Kerinchi,
 59200 Kuala Lumpur, Malaysia

General Line 1: +603 7781 1977 | General Line 2: +6012 781 1797

www.saint-gobain.my

[f](#) [in](#) [@](#) [v](#) [+](#) saintgobainprima